



PRODUCT BULLETIN

DEXRON®-VI Multi-Vehicle Full Synthetic ATF

PRODUCT #298

CAM2 DEXRON®-VI Multi-Vehicle Full Synthetic Automatic Transmission Fluid is a universal ATF specifically designed for use in modern automatic transmissions. CAM2 DEXRON®-VI Multi-Vehicle Full Synthetic ATF is a licensed DEXRON®-VI ATF and is the only GM® approved specification for vehicle of model years 2006 and newer. CAM2 DEXRON®-VI Multi-Vehicle Full Synthetic ATF provides additional oxidation control required for extended drain intervals, excellent low temperature performance for fuel economy, and superb shear stability. CAM2 DEXRON®-VI Multi-Vehicle Full Synthetic ATF is recommended for use in: GM DEXRON®-VI, DEXRON® III/III(H)/IIE, DEXRON® II, Ford MERCON® LV, SP, V, Hyundai/Kia SP-II/III/IV, Toyota WS, T-III, T-IV Mercedes Benz®, Honda® Z-1, Allison®, and Nissan® Matic Fluids.

Cannot be used in extended drain heavy duty diesel, Type F, CVT or DCT applications. Refer to owner's manual for manufacturer's recommendation.

FEATURES

CAM2 DEXRON®-VI Multi-Vehicle Full Synthetic ATF


- Lower Foaming
- Excellent Oxidation Stability
- Better Protection against Pitting
- Highly Shear Stable
- Fully Synthetic Formulation

GM DEXRON-VI

Approved License Number: J-60177

TYPICAL DATA

Product Code	298
Kinematic Viscosity, D-445 cSt@100°C	6.0
Kinematic Viscosity, D-445 cSt@40°C	29.11
Viscosity Index, Calculated, D2270	153
Brookfield Viscosity, D-2893 cPat @ -40°C	10,000
Color	Red

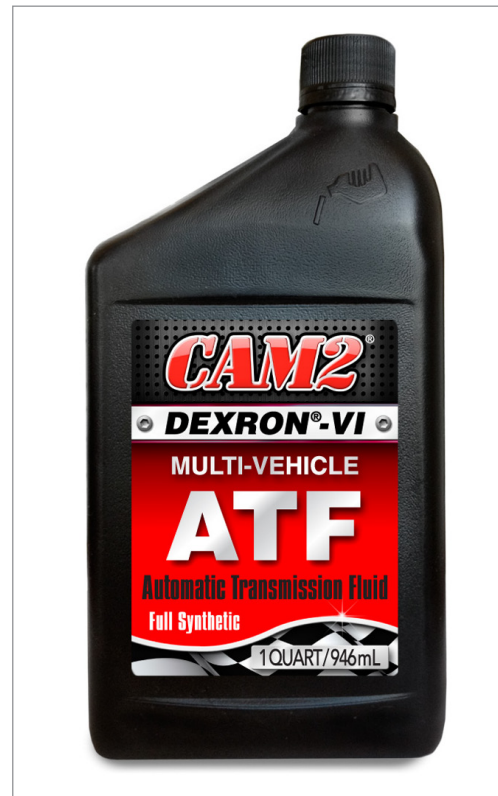

*DEXRON® is a registered trademark of General Motors Corporation

See Applications on pg 2.

CAM2 INTERNATIONAL, LLC

685 Haining Road, Vicksburg, MS 39183 USA • Tel: 800-338-2262

www.CAM2.com



PRODUCT BULLETIN

DEXRON®-VI Multi-Vehicle Full Synthetic ATF

PRODUCT #298

APPLICATIONS

CAM2 DEXRON®-VI Multi-Vehicle Full Synthetic ATF provides superior friction durability as required by OEM strict testing limits, providing smooth operation and protection over the life of the vehicle.

CAM2 DEXRON®-VI Multi-Vehicle Full Synthetic ATF is also suitable for the following applications:
DEXRON®-VI, MERCON® LV

GM DEXRON®-VI (License # J-60158)	Ford WSS M2C 922A1, 924A (XT-8-QAW) JWS 3309	Nissan Matic Fluid C/D/J/K/S
Ford MERCON® LV	Fuso ATF-II/SPIII/A4	Opel (all vehicles)
Acura ATF-Z1	GM9986195 (Aisin AW, JWS 3309)	Peugeot ZF 4HP20
AISIN WARNER JWS 3309, JWS 3324, T IV, AW-1	GM TASA	Porsche ZF 5HP19FL, ZF 5HP20, LT71141
ALLISON Technical Engineering Application TES 295	GM DEXRON®-II/IIID/IIIE/IIIG/IIIH	Porsche ATF 3403-M115,
ALLISON C-3/ C-4	Hino Blue ribbon ATF	Porsche T-IV (JWS 3309)
American Motors ATF +3/+4	Honda ATF-Z1 (except in CVTs)	Saab T-IV (JWS 3309)
ATF RED 1, RED 1K	Honda DW-1	Saab 93 165 147
Audi 5 HP LT71141 (ZF 5 HP 18FL/19FL/24A)	Hyundai/Kia SP-IV/SPI-IV M/SP-IV-RR/SP-III	Saturn T-IV (JWS 3309)
Audi G 052 162-A1/A2	Hyundai/Kia Dex-II/ SP-II	Scion (all vehicles)
BMW JWS 3309 (T-IV)	Hyundai/Kia JWS 3314/9683	Shell 3403, M115, LA 2634
BMW LA2634	ISUZU BESCO ATF-II /III	Subaru ATF
BMW LT71141 (ZF 5 HP 18FL/19FL/24A)	Jaguar ATF 3403 M115, ATF 3403-M115,	Subaru ATF 5AT
BMW ZF 5HP18FL, 5HP24, 5HP30	Jaguar ATF LT71141, ZF 5HP24	Subaru DEXRON®-II
BMW 7045E	Jaguar JLM20238	Subaru ATF, ATF HP
BMW ETL-8072B	Jaguar ATF 3403 JLM20238,	Suzuki AT OIL 5D06
BMW MINI	JASO M315-2013 1A-LV	Suzuki ATF 2326/2384K/JWS 3309/3314/3317
CAT TO-2	JEEP ATF+3, +4	Texaco 7045-E/8072B/N402
Chrysler ATF+, +2, +3 (MS 7176E), +4 (MS 9602)	Lexus JWS 3309	Toyota ATF D-II/D-III/T-III/T-IV/WS
Chrysler/Dodge MOPAR AS 68 RC (T-IV), JWS 3309	KIA ATF SP-II, SP-III, SP-IV, SP-IVM, Red 1	Vickers M2950-S, I-286-S
Daewoo LT 71141	Mazda ATF D-II/M-III/M-V/FZ/S-1/N-1	Voith 55.6335.xx (G607)
Daihatsu AMMIX ATF D-II	Mazda ATF F-1	Volvo CE 97340
Daihatsu AMMIX ATF D-III SP	MAZDA ATF 3317	VW 5 HP (ZF 5 HP 30)/(18FL, 30)/(19FL, 24A)
Esso LT 71141	MB 236.1/236.2/236.3/236.5/236.6/236.7/236.8/236.9	VW G-055-025 A2 (JWS 3309)
FIAT T-IV type, JWS 3309	MINI COOPER T-IV	VW TL 521 62
Ford MERCON®	Mitsubishi Diaqueen SK/SP-II/SP-III/SP-IV/AW/J2/J3	ZF all 3 & 4 speed transmission
Ford FNR5/M2C138CJ/M2C166H	Mitsubishi Diaqueen ATF PA	ZF TE-ML 09/09X/11A/11B
Ford WSS M2C 138CJ, 166H	NAG 1 (Chrysler, Jeep, Cherokee)	

*Not recommended for use in CVT, DCT, Ford TYPE F or G applications.

Contact your CAM2 representative or CAM2 distributor for additional information.

CAM2 INTERNATIONAL, LLC

685 Haining Road, Vicksburg, MS 39183 USA • Tel: 800-338-2262

www.CAM2.com